



HAL
open science

On the Dynamics Modeling of Free-Floating-Base Articulated Mechanisms and Applications to Humanoid Whole-Body Dynamics and Control

Karim Bouyarmane, Abderrahmane Kheddar

► **To cite this version:**

Karim Bouyarmane, Abderrahmane Kheddar. On the Dynamics Modeling of Free-Floating-Base Articulated Mechanisms and Applications to Humanoid Whole-Body Dynamics and Control. *Humanoids*, Nov 2012, Osaka, Japan. pp.036-042, 10.1109/HUMANOIDS.2012.6651496. lirmm-00765815

HAL Id: lirmm-00765815

<https://hal-lirmm.ccsd.cnrs.fr/lirmm-00765815>

Submitted on 16 Dec 2012

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

On the Dynamics Modeling of Free-Floating-Base Articulated Mechanisms and Applications to Humanoid Whole-Body Dynamics and Control

Karim Bouyarmane* and Abderrahmane Kheddar†

*ATR Computational Neuroscience Laboratories, Kyoto, Japan

Email: karim.bouyarmane at atr.jp

†CNRS-AIST Joint Robotics Laboratory (JRL), UMI3218/CRT, Tsukuba, Japan

CNRS-UM2 Laboratoire d'Informatique de Robotique et de Microrélectronique de Montpellier (LIRMM), France

Email: abderrahmane.kheddar at lirmm.fr

Abstract—We propose in this paper a general analytic scheme based on Gauss principle of least constraint for the derivation of the Lagrangian dynamics equation of motion of arbitrarily parameterized free-floating-base articulated mechanisms. The free-floating base of the mechanism is a non-actuated rigid object evolving in the 6D Lie group $SE(3)$, the $SO(3)$ component of which can be parameterized using arbitrary coordinate charts with equality constraints, for instance unit quaternions (also known as Euler parameters). This class of systems includes humanoid robots, and the presented formalism is particularly suitable for the whole-body dynamics modeling and control problem of such humanoid systems. Example motions of humanoid in arbitrary contact states with the environment demonstrate the originality of the approach.

I. INTRODUCTION

In [1] an elegant scheme for the derivation of the equation of motion of a humanoid robot is presented. This scheme allows for an analytic expression of the Lagrangian dynamics of humanoid robots, and more generally of any free-floating-base articulated mechanism (such as those studied in space robotics [2]–[5] before being applied to humanoids [6]), that contrasts with other algorithmically-oriented Newton-Euler recursive schemes, e.g. [7]. The analytic scheme directly considers the whole humanoid system, including its free-floating base, as one Lagrangian system with generalized coordinates that are simply time-differentiated once and twice in order to yield the equation of motion, rather than using specific kinematic quantities such as the angular velocity vector and its time derivative, that are not obtained through the time-differentiation of the generalized coordinates of the systems [8] [9] [10].

Advantages of this analytic approach are multiple. First it allows us to model the entire humanoid system without pre-specification of a particular contact state. The same model can thus be used for a humanoid in single-support stance on either foot, in double-support stance on both feet, or in any other stance on hands, knees, or elbows, with or without using the feet for support, see Fig. 1. It also allows for simple-to-implement yet general dynamics model algorithm provided that a sub-algorithm for the computation

of basic geometric Jacobian matrices between two bodies of a kinematic chain is available, see [11] [12]. The dynamics model algorithm here just consists in the straightforward implementation of the presented analytic expressions. Finally, as opposed to classical treatments of Lagrangian dynamics, and as stressed by the author in [1], the proposed approach does not require the computation of the Christoffel symbols that need a powerful symbolic (algebraic) computation framework in order to be general enough to encompass more than one particular robot model.

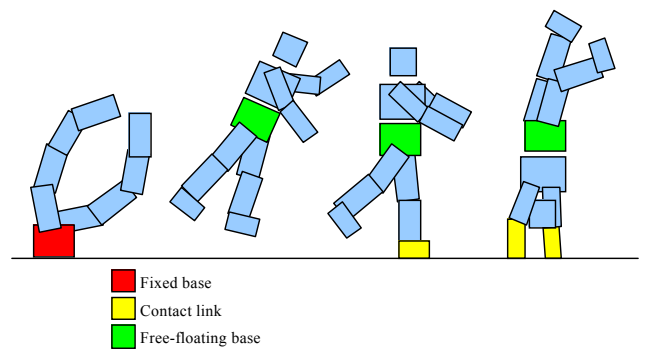


Fig. 1. Examples of fixed-base mechanism and free-floating-base mechanisms in various contact configurations.

However, the author in [1] does not tackle the problem of manifold parameterization of the rotation group for the free-floating base. This parameterization will result in additional Lagrange multipliers associated with the equality constraints acting on the set of generalized coordinates, for instance the unit-norm constraint for the 4-dimensional quaternion parameterization (Euler parameters), or the orthogonality constraints for the 9-dimensional rotation matrix parameterization. Our contribution in this paper is to take into account these constraints, proposing elementary linear algebra calculation schemes that do not necessitate the recourse to tensor analysis tools.

The rest of the paper is organized as follows. We first introduce notations and preliminary computations of certain

Jacobian matrices and push-forward mappings in Section II. We then apply Gauss principle to derive the equation of motion in Section III, and summarize our computations in the algorithm that we present in Section IV. The dynamics equation is then used in the control scheme of Section V, and Section VI demonstrates some example humanoid motions synthesized through this scheme. We conclude the paper in Section VII. In the Appendix Section, a synthetic view of all the notations of the paper is provided.

II. PRELIMINARY COMPUTATIONS

Let us consider an articulated mechanism made of $n + 1$ rigid bodies (links) indexed by the variable k in $\{0, \dots, n\}$, the body $k = 0$ being the free-floating base link of the mechanism, and that are articulated through m revolute or prismatic joints indexed by the variable j in $\{1, \dots, m\}$. The general contact state of the mechanism is modeled as follows. On each body $k \in \{0, \dots, n\}$ a set of n_k contact forces $f_{k,1}, \dots, f_{k,n_k}$ are applied at the respective body-frame-expressed¹ contact points $a_{k,1}, \dots, a_{k,n_k}$ belonging to the surface cover of the body ($n_k = 0$ if there is no contact on body k). We emphasize here the fact that, in the case of an anthropomorphic system, these contact forces are not restricted to be applied on the foot bodies.

We then consider the following generalized coordinates of the system (for convenience, we will use throughout the paper the same notations as in [1] when applicable). The base link of the system, $k = 0$, is parameterized with a global position variable $x_0 \in \mathbb{R}^3$ and a global orientation variable $\theta_0 \in \mathbb{R}^d$, d being the dimensionality of the parameterization we choose for the $SO(3)$ manifold, see Table I.

TABLE I
PARAMETRIZATION OF THE ORIENTATION OF THE BASE LINK.

θ_0	$d = \dim(\theta_0)$
Euler angles (roll-pitch-yaw)	$d = 3$
Unit quaternion (Euler parameters)	$d = 4$
Rotation matrix	$d = 9$

Finally the rest of the articulated configuration of the mechanism forms the internal joint angle vector $\hat{q} \in \mathbb{R}^m$. All in all, the generalized coordinates of the system are expressed in the concatenated vector

$$q = (x_0, \theta_0, \hat{q}) \in \mathbb{R}^{3+d+m} \quad (1)$$

Let R_k denote the orientation matrix of the body k , ω_k^{body} be its body-frame-expressed angular velocity with respect to the inertial frame, and x_k the inertial-frame-expressed global (i.e. relative to the inertial frame) position of the origin of the body frame. In particular, R_0 denotes the orientation matrix of the base link. Let ω_0^{global} and ω_0^{base} denote, respectively, the global-frame-expressed and base-link-frame-expressed angular velocity vector of the base link body with respect

¹in the paper we use the expression “ A -frame-expressed quantity v ” to mean “the vector of coordinates of the quantity v expressed in the frame A ”

to the inertial (global) frame. These vectors are related to the time derivative of θ_0 through the two following linear mappings

$$\omega_0^{\text{global}} = J_{\omega_0}^{\text{global}} \dot{\theta}_0 \quad \text{and} \quad \omega_0^{\text{base}} = J_{\omega_0}^{\text{base}} \dot{\theta}_0 \quad (2)$$

We now propose a calculation method for the two matrices $J_{\omega_0}^{\text{global}}$ and $J_{\omega_0}^{\text{base}}$, for any arbitrarily chosen parameterization θ_0 . The angular velocity vector ω_0^{global} can be defined as the vector $\omega_0^{\text{global}} \in \mathbb{R}^3$ such that

$$[\omega_0^{\text{global}} \times] = \dot{R}_0 R_0^T, \quad (3)$$

where, for a vector $u \in \mathbb{R}^3$, we use the notation

$$[u \times] = \begin{pmatrix} 0 & -u_3 & u_2 \\ u_3 & 0 & -u_1 \\ -u_2 & u_1 & 0 \end{pmatrix}. \quad (4)$$

Moreover, we can show that the following fundamental relation holds, $\forall u \in \mathbb{R}^3$:

$$\frac{\partial(R_0 u)}{\partial \theta_0} = -[(R_0 u) \times] J_{\omega_0}^{\text{global}} = -R_0 [u \times] R_0^T J_{\omega_0}^{\text{global}}. \quad (5)$$

By applying eq.(5) on the canonical basis vectors of \mathbb{R}^3 , we get, denoting $R_{0,i}$ the i^{th} column of R_0 for $i \in \{1, 2, 3\}$,

$$\frac{\partial R_{0,i}}{\partial \theta_0} = -[R_{0,i} \times] J_{\omega_0}^{\text{global}}. \quad (6)$$

Let now (e_1, e_2, e_3) be any orthonormal basis of \mathbb{R}^3 , from the properties of the scalar triple product it follows that, for any vector $u \in \mathbb{R}^3$,

$$u = (u \times e_1 | e_2) e_3 + (u \times e_2 | e_3) e_1 + (u \times e_3 | e_1) e_2. \quad (7)$$

This identity is extendible to any 3×3 matrix M ,

$$M = -e_3 e_2^T [e_1 \times] M - e_2 e_1^T [e_3 \times] M - e_1 e_3^T [e_2 \times] M. \quad (8)$$

R_0 being an orthogonal matrix, its columns form an orthonormal basis of \mathbb{R}^3 , thus we can apply eq.(8) to get

$$\begin{aligned} J_{\omega_0}^{\text{global}} &= -R_{0,3} R_{0,2}^T [R_{0,1} \times] J_{\omega_0}^{\text{global}} - R_{0,2} R_{0,1}^T [R_{0,3} \times] J_{\omega_0}^{\text{global}} \\ &\quad - R_{0,1} R_{0,3}^T [R_{0,2} \times] J_{\omega_0}^{\text{global}}. \end{aligned} \quad (9)$$

Finally, replacing the corresponding expressions from eq.(6), we get our final expression

$$J_{\omega_0}^{\text{global}} = R_{0,3} R_{0,2}^T \frac{\partial R_{0,1}}{\partial \theta_0} + R_{0,2} R_{0,1}^T \frac{\partial R_{0,3}}{\partial \theta_0} + R_{0,1} R_{0,3}^T \frac{\partial R_{0,2}}{\partial \theta_0} \quad (10)$$

Note that the latter expression requires the computation of the derivatives $\frac{\partial R_{0,i}}{\partial \theta_0}$, which can be easily obtained from the mapping $\rho : \theta_0 \rightarrow R_0$ that can be found in introductory kinematics textbooks (writing a rotation matrix as a function of the rotation parameterization). For instance, let us consider

a unit quaternion parameterization, $\theta_0 = (\alpha, \beta, \gamma, \delta)$, then the expression of the mapping ρ is given as $R_0 = \rho(\theta_0) =$

$$\begin{pmatrix} 2(\alpha^2 + \beta^2) - 1 & 2(\beta\gamma - \alpha\delta) & 2(\beta\delta + \alpha\gamma) \\ 2(\beta\gamma + \alpha\delta) & 2(\alpha^2 + \gamma^2) - 1 & 2(\gamma\delta - \alpha\beta) \\ 2(\beta\delta - \alpha\gamma) & 2(\gamma\delta + \alpha\beta) & 2(\alpha^2 + \delta^2) - 1 \end{pmatrix} \quad (11)$$

And the $\frac{\partial R_{0,i}}{\partial \theta_0}$ can be derived as

$$\begin{aligned} \frac{\partial R_{0,1}}{\partial \theta_0} &= \begin{pmatrix} 4\alpha & 4\beta & 0 & 0 \\ 2\delta & 2\gamma & 2\beta & 2\alpha \\ -2\gamma & 2\delta & -2\alpha & 2\beta \end{pmatrix}, \\ \frac{\partial R_{0,2}}{\partial \theta_0} &= \begin{pmatrix} -2\delta & 2\gamma & 2\beta & -2\alpha \\ 4\alpha & 0 & 4\gamma & 0 \\ 2\beta & 2\alpha & 2\delta & 2\gamma \end{pmatrix}, \\ \frac{\partial R_{0,3}}{\partial \theta_0} &= \begin{pmatrix} 2\gamma & 2\delta & 2\alpha & 2\beta \\ -2\beta & -2\alpha & 2\delta & 2\gamma \\ 4\alpha & 0 & 0 & 4\delta \end{pmatrix}. \end{aligned} \quad (12)$$

Now that we have computed $J_{\omega_0}^{\text{global}}$ in eq.(10), we have

$$J_{\omega_0}^{\text{base}} = R_0^T J_{\omega_0}^{\text{global}}. \quad (13)$$

Back to our free-floating-base mechanism. For a body $k \in \{0, \dots, n\}$ and a point belonging the body with coordinates $p \in \mathbb{R}^3$ expressed in the body frame, we denote $J_{tk}(p)$, J_{rk}^{global} , J_{rk}^{local} , respectively, the translational Jacobian matrix at p , the body-frame-expressed rotational Jacobian matrix, and the inertial-frame-expressed rotational Jacobian matrix, of the body k relative to the inertial frame with respect to q . Similarly, $\hat{J}_{tk}(p)$, $\hat{J}_{rk}^{\text{base}}$, $\hat{J}_{rk}^{\text{local}}$, denote, respectively, the translational Jacobian matrix at p , the base-link-frame-expressed rotational Jacobian matrix, and the body-frame-expressed rotational Jacobian matrix, of the body k relative to the base link body with respect to \hat{q} (in other words, hatted Jacobian matrices are for the articulated motion with respect to the base link, non-hatted Jacobian matrices are for the free-floating-base articulated motion with respect to the inertial frame, thus the latter taking into account the contribution of the base-link motion). Algorithms for the computation of the matrices $\hat{J}_{tk}(p)$, $\hat{J}_{rk}^{\text{base}}$, $\hat{J}_{rk}^{\text{local}}$, also known as geometric or kinematic Jacobian matrices, are widely available in the kinematics literature [11] [12]. We show in the sequel how these matrices can be used to compute the less common matrices $J_{tk}(p)$, J_{rk}^{global} , J_{rk}^{local} . First we have, for the translational Jacobian matrix

$$J_{tk}(p) = [\mathbf{1}_{3 \times 3} \mid -(x_k + R_k p - x_0) \times R_0 J_{\omega_0}^{\text{base}} \mid R_0 \hat{J}_{tk}(p)] \quad (14)$$

Remark 1: If we denote $p^0 = R_0^T(x_k + R_k p - x_0)$ as the base-link-frame-expressed position of p , which does not depend on θ_0 , then we can show that

$$\begin{aligned} -(x_k + R_k p - x_0) \times R_0 J_{\omega_0}^{\text{base}} &= -[R_0 p^0 \times] J_{\omega_0}^{\text{global}} \\ &= \frac{\partial R_0 p^0}{\partial \theta_0} \\ &= \left[\frac{\partial R_{0,i}}{\partial \theta_{0,i}} p^0 \right]_{i=1, \dots, d} \end{aligned} \quad (15)$$

This gives as an alternative scheme for computing the middle columns in eq.(14).

We also have, for the rotational Jacobian matrices,

$$J_{rk}^{\text{local}} = [\mathbf{0}_{3 \times 3} \mid R_k^T R_0 J_{\omega_0}^{\text{base}} \mid \hat{J}_{rk}^{\text{local}}] \quad (16)$$

$$J_{rk}^{\text{global}} = R_k J_{rk}^{\text{local}} = [\mathbf{0}_{3 \times 3} \mid J_{\omega_0}^{\text{global}} \mid R_0 \hat{J}_{rk}^{\text{base}}] \quad (17)$$

Remark 2: Expression (17) is consistent with the composition rule of angular velocities

$$\begin{aligned} \omega_k^{\text{global}} &= J_{rk}^{\text{global}} \dot{q}, \\ &= J_{\omega_0}^{\text{global}} \dot{\theta}_0 + R_0 (\hat{J}_{rk}^{\text{base}} \dot{\hat{q}}), \\ &= \omega_0^{\text{global}} + R_0 \omega_{k/\text{base}}^{\text{base}}, \end{aligned} \quad (18)$$

where $\omega_{k/\text{base}}^{\text{base}}$ is the base-link-frame-expressed rotational velocity of the body k with respect to the base link.

Remark 3: We can easily verify that the two following transport formulas are consistent with the above derivations of the translational and rotational Jacobian matrices:

$$J_{tk}(a) = J_{tk}(b) - R_k [(a - b) \times] J_{rk}^{\text{local}}, \quad (19)$$

$$\hat{J}_{tk}(a) = \hat{J}_{tk}(b) - R_0^T R_k [(a - b) \times] \hat{J}_{rk}^{\text{local}}. \quad (20)$$

To conclude this notation section, we denote c_k the body-frame-expressed center of mass of the body k , m_k its mass, and $I_k(p)$ its inertia matrix expressed at the body-frame-expressed point p . We recall that

$$I_k(c_k) = I_k(\mathbf{0}_3) - m_k ((c_k^T c_k) \mathbf{1}_{3 \times 3} - c_k \otimes c_k). \quad (21)$$

Let g denote the gravity vector, and $u \in \mathbb{R}^m$ denote our torque control input acting on the actuated joints of the mechanism (i.e. internal joints, $\dim(u) = \dim(\hat{q}) = m$).

III. GAUSS' PRINCIPLE WITH MANIFOLD EQUALITY CONSTRAINTS

Following [1], we apply Gauss' principle of least constraint [13] (also used in robotics for redundant robots in [14], or for simulation in [15]) which states that at a given state of the system (given position and velocity), the acceleration of a constrained articulated system deviates the least from the acceleration it would have in the absence of any constraints induced by the presence of the joints linking the bodies. The deviation is measured through the following quantity

$$\begin{aligned} D &= \sum_{k=0}^n \frac{1}{2} (\ddot{x}_k - \underline{\ddot{x}}_k)^T m_k (\ddot{x}_k - \underline{\ddot{x}}_k) \\ &+ \sum_{k=0}^n \frac{1}{2} (\dot{\omega}_k^{\text{body}} - \underline{\dot{\omega}}_k^{\text{body}})^T I_k(c_k) (\dot{\omega}_k^{\text{body}} - \underline{\dot{\omega}}_k^{\text{body}}), \end{aligned} \quad (22)$$

where the underlined quantities are the accelerations of the bodies if they were not linked together.

Without the equality constraints that stem from the parameterization of the orientation of the base link θ_0 , this principle would translate into the following optimality condition

$$\frac{\partial D}{\partial \ddot{q}} = 0, \quad (23)$$

which can be rewritten in the form (see [1] for details of the derivation ²),

$$M(q)\ddot{q} + N(q, \dot{q})\dot{q} = M(q) \begin{pmatrix} g \\ \mathbf{0}_d \\ \mathbf{0}_m \end{pmatrix} + \begin{pmatrix} \mathbf{0}_3 \\ \mathbf{0}_d \\ u \end{pmatrix} + \sum_{k=0}^n \sum_{i=1}^{n_k} J_{tk}(a_{k,i})^T f_{k,i}, \quad (24)$$

where the expressions of the matrices M and N are given as

$$M(q) = \sum_{k=0}^n J_{tk}(c_k)^T m_k J_{tk}(c_k) + J_{rk}^{\text{local}T} I_k(c_k) J_{rk}^{\text{local}}, \quad (25)$$

$$N(q, \dot{q}) = \sum_{k=0}^n J_{tk}(c_k)^T m_k \dot{J}_{tk}(c_k) + J_{rk}^{\text{local}T} I_k(c_k) \dot{J}_{rk}^{\text{local}} - J_{rk}^{\text{local}T} (I_k(c_k) J_{rk}^{\text{local}} \dot{q}) \times J_{rk}^{\text{local}}. \quad (26)$$

However, the choice of a particular manifold (algebraic variety) parameterization of the rotation group $SO(3)$ brings along a set of equality constraints

$$C(q) = \mathbf{0}, \quad (27)$$

that act on the set of parameters θ_0 , $C : \mathbb{R}^{3+d+m} \rightarrow \mathbb{R}^{d-\dim(SO(3))}$ being a mapping of dimension $\dim(C) = d - \dim(SO(3)) = d - 3$, see Table II (note: in the last row we did not remove redundant (symmetric) constraints for the sake of notation, we also do not take into account $\det(\theta_0) = +1$ given that the initial state satisfies this latter condition and that we stay throughout the continuous motion in the same connected component of $O(3)$).

TABLE II
EQUALITY CONSTRAINTS ACTING ON θ_0

θ_0	$\dim(C)$	C
Euler angles (roll-pitch-yaw)	0	-
Unit quat. (Euler parameters)	1	$C(q) = \theta_0^T \theta_0 - 1$
Rotation matrix	6	$C(q) = \theta_0^T \theta_0 - \mathbf{1}_{3 \times 3}$

For instance, let us consider the case of the unit quaternion parameterization. In that case C takes the form

$$C(q) = q^T S^T S q - 1, \quad (28)$$

where S is a selection matrix that selects the θ_0 component in q

$$S = \begin{pmatrix} \mathbf{0}_{d \times 3} & \mathbf{1}_{d \times d} & \mathbf{0}_{d \times m} \end{pmatrix}. \quad (29)$$

²noting that $m_k \ddot{x}_k = \sum_{i=0}^{n_k} f_{k,i}$, $I_k \dot{\omega}_k^{\text{body}} - (I_k \dot{\omega}_k^{\text{body}}) \times \dot{\omega}_k^{\text{body}} = \sum_{i=0}^{n_k} a_{k,i} \times f_{k,i}$, $\ddot{x}_k = J_{tk}(c_k) \ddot{q} + \dot{J}_{tk}(c_k) \dot{q}$, $\dot{\omega}_k^{\text{body}} = J_{rk}^{\text{local}} \dot{q} + J_{rk}^{\text{local}} \dot{q}$.

We then time-differentiate eq.(27) twice to get a constraint on the variable \ddot{q}

$$\tilde{C}(\ddot{q}) = q^T S^T S \ddot{q} + \dot{q}^T S^T S \dot{q} = 0. \quad (30)$$

The optimality condition eq.(23) becomes now, taking into account the constraint eq.(30),

$$\begin{cases} \frac{\partial D}{\partial \ddot{q}} - \frac{\partial \tilde{C}}{\partial \ddot{q}} \lambda = 0, \\ \tilde{C}(\ddot{q}) = 0, \end{cases} \quad (31)$$

where $\lambda \in \mathbb{R}^{d-3}$ is the Lagrange multiplier associated with the constraint eq.(30). The equation of motion eq.(24) thus becomes:

$$M(q)\ddot{q} + N(q, \dot{q})\dot{q} = M(q) \begin{pmatrix} g \\ \mathbf{0}_d \\ \mathbf{0}_m \end{pmatrix} + \begin{pmatrix} \mathbf{0}_3 \\ \mathbf{0}_d \\ u \end{pmatrix} + \sum_{k=0}^n \sum_{i=1}^{n_k} J_{tk}(a_{k,i})^T f_{k,i} + S^T S q \lambda, \quad (32)$$

where the matrices M and N keep the exact same forms as in eq.(25) and eq.(26) respectively, and where we can solve for the Lagrange multiplier λ by pre-multiplying eq.(32) by q^T as follows [16]:

$$\lambda = q^T \left[M(q)\ddot{q} + N(q, \dot{q})\dot{q} - M(q) \begin{pmatrix} g \\ \mathbf{0}_d \\ \mathbf{0}_m \end{pmatrix} + \begin{pmatrix} \mathbf{0}_3 \\ \mathbf{0}_d \\ u \end{pmatrix} - \sum_{k=0}^n \sum_{i=1}^{n_k} J_{tk}(a_{k,i})^T f_{k,i} \right]. \quad (33)$$

Let us define the following matrix

$$A = \mathbf{1}_{(3+d+m) \times (3+d+m)} - S^T S q q^T. \quad (34)$$

By re-injecting eq.(33) into eq.(32) we get our final dynamics equation of motion expression

$$A [M(q)\ddot{q} + N(q, \dot{q})\dot{q}] = A \left[M(q) \begin{pmatrix} g \\ \mathbf{0}_d \\ \mathbf{0}_m \end{pmatrix} + \begin{pmatrix} \mathbf{0}_3 \\ \mathbf{0}_d \\ u \end{pmatrix} + \sum_{k=0}^n \sum_{i=1}^{n_k} J_{tk}(a_{k,i})^T f_{k,i} \right]. \quad (35)$$

It is worth pointing out that in eq.(35), $\ddot{q} = (\ddot{x}_0, \ddot{\theta}_0, \ddot{q})$ is the actual second time-derivative of q . In particular, $\ddot{\theta}_0$ is simply obtained by time-differentiating twice the parameters in θ_0 .

IV. DYNAMICS ALGORITHM

The proposed algorithm here consists simply in carrying out the computations presented in the two previous sections in the order outlined in the following algorithm:

- 1: Compute eq.(10) then eq.(13)

- 2: Compute $\hat{J}_{tk}, \hat{J}_{rk}^{\text{base}}, \hat{J}_{rk}^{\text{local}}$ using standard kinematic Jacobian matrices computation algorithms (also known by some authors as geometric Jacobian matrices) [11] [12]
- 3: Compute eq.(14), eq.(16), and eq.(17)
- 4: Compute eq.(21)
- 5: Compute eq.(25) and eq.(26)
- 6: Apply eq.(35) for forward or inverse dynamics purposes

V. APPLICATION TO WHOLE-BODY CONTROL OF HUMANOID ROBOT

In [17] we presented in simulation a control scheme for free-floating-base humanoid robot in general contact configuration with the environment by solving at each time step of the simulation the following quadratic program [18] [19],

$$\begin{aligned} & \min_{\dot{q}, u, f} \sum_i \|\ddot{\tau}_i - \ddot{\tau}_i^{\text{desired}}\|^2 \\ \text{subject to } & \begin{cases} u \in U \\ f \in K \\ \forall k, i : J_{tk}(a_{k,i})\ddot{q} + \dot{J}_{tk}(a_{k,i})\dot{q} = 0 \\ \text{Eq. (24)}. \end{cases} \end{aligned} \quad (36)$$

where τ_i are a set of control tasks (position of a point of one of the bodies, position of the center of mass of the robot, whole configuration of the robot, etc.), U are the bounds on the actuation torques, and K are the linearized Coulomb friction cones at the contact points a .

Taking now into account the new equation of motion eq.(35) along with the constraint eq.(30) that happens to be a linear constraint in \ddot{q} , we still have a quadratic program formulation, and eq.(36) becomes now

$$\begin{aligned} & \min_{\dot{q}, u, f} \sum_i \|\ddot{\tau}_i - \ddot{\tau}_i^{\text{desired}}\|^2 \\ \text{subject to } & \begin{cases} u \in U \\ f \in K \\ \forall k, i : J_{tk}(a_{k,i})\ddot{q} + \dot{J}_{tk}(a_{k,i})\dot{q} = 0 \\ \text{Eq. (35)} \\ q^T S^T S \ddot{q} + \dot{q}^T S^T S \dot{q} = 0. \end{cases} \end{aligned} \quad (37)$$

Remark 4: Without need of analytically solving for the Lagrange multiplier in eq.(32), we can still formulate an equivalent quadratic program as follows:

$$\begin{aligned} & \min_{\dot{q}, u, f, \lambda} \sum_i \|\ddot{\tau}_i - \ddot{\tau}_i^{\text{desired}}\|^2 \\ \text{subject to } & \begin{cases} u \in U \\ f \in K \\ \forall k, i : J_{tk}(a_{k,i})\ddot{q} + \dot{J}_{tk}(a_{k,i})\dot{q} = 0 \\ \text{Eq. (32)} \\ q^T S^T S \ddot{q} + \dot{q}^T S^T S \dot{q} = 0. \end{cases} \end{aligned} \quad (38)$$

VI. EXAMPLES

We improved the motions demonstrated in [17] by applying the new control scheme eq.(37) to the humanoid robot HRP-2 [20] with unit-quaternion-parameterized waist link (the base link) in simulation. Motions on different contact configurations (feet/hands) were dynamically simulated without needing to re-parameterize the configuration of the robot depending on the current contact state. See the attached video and Figs. 2, 3, and 4.

In this video, the sequence of static postures used as input and displayed before each motion is autonomously planned offline using the multi-contact stance planning algorithm in [21] after the user have specified an initial and goal posture or initial and goal set of contact locations. The tasks τ_i are decided online by a finite-state machine as described in [17], these tasks track the position of the CoM and the overall posture of the robot in the next static posture whenever a static posture of the sequence is reached, and an additional task tracks the position of the limb being moved to a new contact location.

As for computation time, the problem eq.(37) is solved at every simulation step, of 1ms, in an average of approximately 7ms, on a 3.06GHz Intel Pentium IV system with 1Gb of RAM memory.

VII. CONCLUSION

We presented a simple algorithm for the computation of the dynamics equation of motion of free-floating-base mechanisms using arbitrary manifold parameterization of the $SO(3)$ group in which the free-floating base of the mechanism evolves rotationally. We instantiated our derivations for the example singularity-free low-dimensional unit-quaternion parameterization of this rotation manifold.

The derivation of the equation of motion followed Gauss' principle of least constraint, taking into account, when writing the optimality condition for this principle, the additional equality constraints acting on the parameters of the chosen manifold coordinate chart. These equality constraints resulted in the emergence of Lagrange multipliers that were solved for and eliminated from the new equation of motion.

As an application, we incorporated this equation, together with the manifold equality constraints, as linear constraints in a quadratic program formulation used for the control and simulation of humanoid robot in various contact configurations between the robot links and the environment. Example motions on single and double-support stances and on handstand were achieved.

The same framework can be used to handle spherical joints (ball-and-socket joint) that are commonly used in the modeling of virtual human characters in computer graphics, prototyping simulation, and biomechanics modeling applications. Future work can investigate this possibility.

Finally, another promising direction for further research building on these results is the modeling of manipulation systems with free-floating manipulated objects using the

same common formulation for the dynamics of the system made of the manipulator and the object.

APPENDIX: NOTATION TABLE

$n + 1$	Number of bodies
$k = 0$	Base link
m	Number of Joints
q	Configuration vector
\hat{q}	Internal (actuated) joint vector
θ_0	Orientation of the base link
d	$\dim(\theta_0)$
x_k	position of the body k
ω_k	Angular velocity of the body k
R_k	Orientation matrix of the body k
\bullet^{local}	expressed in the body frame
\bullet^{base}	expressed in the base-link frame
\bullet^{global}	expressed in the inertial (global) frame
J_{ω_0}	Mapping from θ_0 to ω_0
ρ	Mapping from θ_0 to R_0
J_{tk}	Trans. Jac. Mat. of the body k with resp. to q
J_{rk}	Rot. Jac. Mat. of the body k with resp. to q
\tilde{J}_{tk}	Trans. Jac. Mat. of the body k with resp. to \hat{q}
\tilde{J}_{rk}	Rot. Jac. Mat. of the body k with resp. to \hat{q}
$f_{k,i}$	Contact forces applied on the body k
$a_{k,i}$	Application point of the contact force $f_{k,i}$
D	Deviation from the unconstrained motion
M, N	Dynamics quantities
C	Constraint on q (on θ_0)
\tilde{C}	Constraint on \dot{q}
λ	Lagrange multiplier
S	Selection matrix (of the θ_0 component in q)
u	Actuation torques (control input)
g	Gravity vector
c_k	local-frame expressed CoM of the body k
m_k	Mass of the body k
I_k	Inertia matrix of the body k
τ	Control task (objective, feature)
U	Torque limits
K	Linearized Coulomb friction cone
A	Matrix accounting for the equality constraint
$\mathbf{0}$	Zero vector or matrix
$\mathbf{1}$	Identity matrix

ACKNOWLEDGMENT

This work is partially supported by grants from the RoboHow.Cog FP7 www.robohow.eu, and by Japan Society for the Promotion of Science (JSPS) Grant-in-Aid for Scientific Research (B), 22300071, 2010. The first author is supported with a JSPS Postdoctoral Fellowship for Foreign Researchers, ID No. P12707.

REFERENCES

[1] P.-B. Wieber, "Holonomy and nonholonomy in the dynamics of articulated motion," in *Fast Motions in Biomechanics and Robotics, Optimization and Feedback Control*, ser. Lecture Notes in Control and Information Sciences, vol. 340. Heidelberg, Germany: Springer, 2006, pp. 411–425.

[2] S. Dubowsky and E. Papadopoulos, "The Kinematics, Dynamics, and Control of Free-Floating and Free-Flying Space Robotic Systems," *IEEE Transactions on robotics and automation*, vol. 9, no. 5, pp. 531–543, 1993.

[3] A. Jain and G. Rodriguez, "An analysis of the Kinematics and Dynamics of Underactuated Manipulators," *IEEE Transactions on robotics and automation*, vol. 9, no. 4, pp. 411–422, 1993.

[4] Y. Umetani and K. Yoshida, "Resolved Motion Rate Control of Space Manipulators with Generalized Jacobian Matrix," *IEEE Transactions on robotics and automation*, vol. 5, no. 3, pp. 303–314, 1989.

[5] H. Arai and S. Tachi, "Dynamic Control of a Manipulator with Passive Joints in an Operational Coordinate Space," in *Proceedings of IEEE International Conference on Robotics and Automation*, 1991.

[6] —, "Control of Free-Floating Humanoid Robots Through Task Prioritization," in *Proceedings of IEEE International Conference on Robotics and Automation*, 1991.

[7] R. Featherstone, *Rigid Body Dynamics Algorithms*. Secaucus, NJ, USA: Springer-Verlag New York, Inc., 2007.

[8] L. Saab, O. E. Ramos, N. Mansard, P. Souères, and J.-Y. Fourquet, "Generic dynamic motion generation with multiple unilateral constraints," in *IEEE/RSJ International Conference on Intelligent Robots and Systems (IROS)*, 2011, pp. 4127–4133.

[9] L. Righetti, M. Mistry, J. Buchli, and S. Schaal, "Inverse dynamics control of floating-base robots with external constraints: a unified view," in *Proceedings of the IEEE International Conference on Robotics and Automation*, 2011.

[10] J. Salini, V. Padois, and P. Bidaud, "Synthesis of Complex Humanoid Whole-Body Behavior: a Focus on Sequencing and Tasks Transitions," in *Proceedings of the IEEE International Conference on Robotics and Automation*, 2011.

[11] W. Khalil and E. Dombre, *Modeling, Identification and Control of Robots*, 3rd ed. Bristol, PA, USA: Taylor & Francis, Inc., 2002.

[12] M. W. Spong, S. Hutchinson, and M. Vidyasagar, *Robot Modeling and Control*. New York: John Wiley and Sons, 2006.

[13] F. E. Udwarda and R. E. Kalaba, *Analytical Dynamics: A New Approach*. New York, USA: Cambridge University Press, 1996.

[14] H. Bruyninckx and O. Khatib, "Gauss principle and the dynamics of redundant and constrained manipulators," in *IEEE International Conference on Robotics & Automation (ICRA)*, San Francisco, CA, April 2000, pp. 2563–2568.

[15] S. Redon, A. Kheddar, and S. Coquillart, "Gauss' least constraints principle and rigid body simulations," in *IEEE International Conference on Robotics and Automation (ICRA)*, Washington, DC, May 2002, pp. 517–522.

[16] A. L. Schwab and J. P. Meijaard, "How to draw euler angles and utilize euler parameters," in *ASME International Design Engineering Technical Conferences & Computers and Information in Engineering Conference*, Philadelphia, Pennsylvania, USA, September 10–13, 2006, pp. 1–7.

[17] K. Bouyarmane and A. Kheddar, "Using a multi-objective controller to synthesize simulated humanoid robot motion with changing contact configurations," in *IEEE/RSJ International Conference on Intelligent Robots and Systems*, 2011.

[18] Y. Abe, M. da Silva, and J. Popovic, "Multiobjective control with frictional contacts," in *Eurographics/ACM SIGGRAPH Symposium on Computer Animation*, 2007.

[19] M. de Lasa, I. Mordatch, and A. Hertzmann, "Feature-based locomotion controllers," *ACM Transactions on Graphics*, vol. 29, no. 3, 2010.

[20] K. Kaneko, F. Kanehiro, S. Kajita, H. Hirukawa, T. Kawasaki, M. Hirata, K. Akachi, and T. Isozumi, "Humanoid Robot HRP-2," in *Proceedings of the IEEE International Conference on Robotics and Automation*, 2004.

[21] K. Bouyarmane and A. Kheddar, "Multi-contact stances planning for multiple agents," in *IEEE International Conference on Robotics and Automation*, 2011.

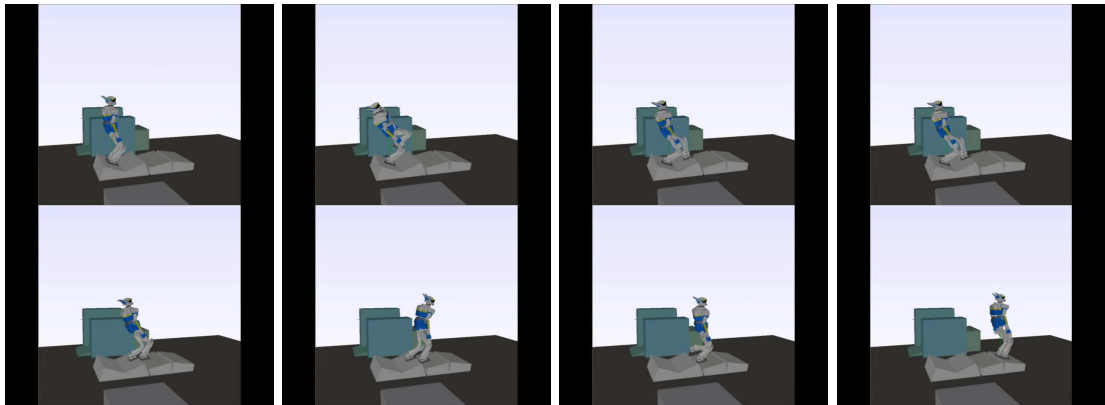


Fig. 2. Motion on single-support and double-support stances on feet.

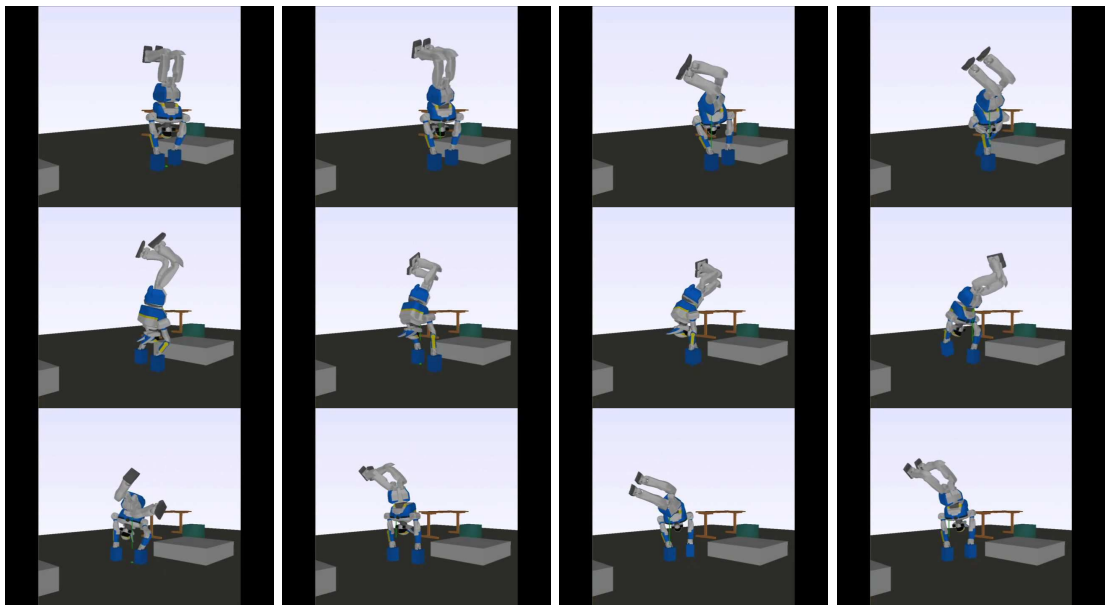


Fig. 3. Motion on single-support and double-support stances on hands.

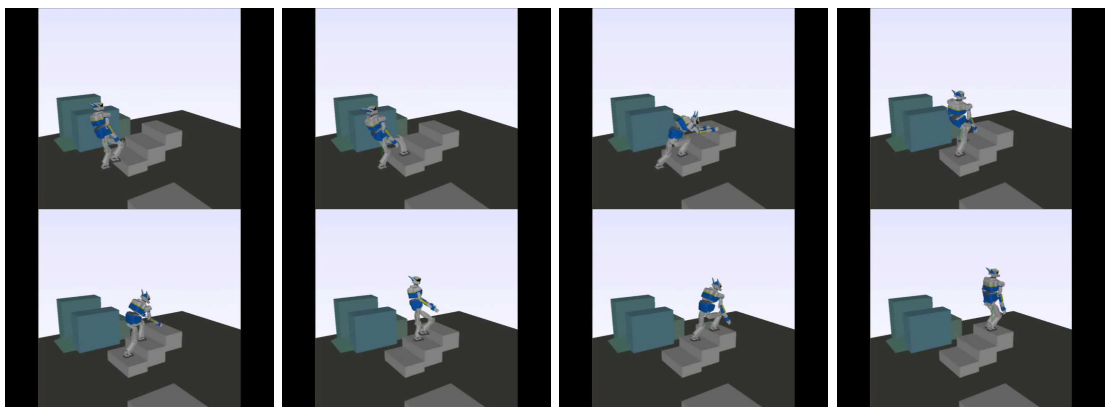


Fig. 4. Motion on single-support and double-support stances on feet.