

Visio-haptic control for Human-Humanoid Cooperative Carrying Tasks

Don Joven Agravante, Andrea Cherubini, Abderrahmane Kheddar

► **To cite this version:**

Don Joven Agravante, Andrea Cherubini, Abderrahmane Kheddar. Visio-haptic control for Human-Humanoid Cooperative Carrying Tasks. HFR: Human-Friendly Robotics, Sep 2013, Rome, Italy. 6th International Workshop on Human-Friendly Robotics, HFR 2013, 2013. <lirmm-01247143>

HAL Id: lirmm-01247143

<https://hal-lirmm.ccsd.cnrs.fr/lirmm-01247143>

Submitted on 21 Dec 2015

HAL is a multi-disciplinary open access archive for the deposit and dissemination of scientific research documents, whether they are published or not. The documents may come from teaching and research institutions in France or abroad, or from public or private research centers.

L'archive ouverte pluridisciplinaire **HAL**, est destinée au dépôt et à la diffusion de documents scientifiques de niveau recherche, publiés ou non, émanant des établissements d'enseignement et de recherche français ou étrangers, des laboratoires publics ou privés.

Visio-haptic control for Human-Humanoid Cooperative Carrying Tasks

Don Joven Agravante¹, Andrea Cherubini¹ and Abderrahmane Kheddar^{1,2}

Humanoid robotics focuses on the design of robots directly inspired by human capabilities. This design gives many advantages when working together with humans. Because of this, humanoids are ideal research platforms for physical Human-Robot Interaction (pHRI). The particular focus of this work is in the integration of visual servoing in pHRI, specifically in human-humanoid collaborative tasks. Early work on human-humanoid collaboration was done in [3], where a panel is transported, and vision is used to recognize it. However, this involves an interaction of the robot with the panel only, and not with the human.

In this work, a first step is taken towards using vision in human-humanoid haptic joint actions. Haptic interaction exists when forces applied by the human on the carried object are felt by the robot and vice-versa. In this research area, the focus is on regulating the interaction forces for safety, and on making the robot proactive in helping the human [4], [5]. Since physical interaction is fundamental, most works use data from force/torque sensors only. However, force/torque data is not rich enough for some tasks, where vision can provide new information.

The focus of the work here is a carrying task where human and robot grasp an object at opposite ends and move it together. This task has been studied in [6], where the height at which the robot holds the table is kept constant, with no regard for how the human holds the table at the other end. However, it is desirable to keep the table horizontal to avoid objects on top from sliding. Besides, the robot should adjust to the human when s/he is leading the task. The strategy taken here is using vision to observe the table inclination and then servoing the height to correct it. This is done while regulating the interaction forces.

The six degrees of freedom (DOF) of the table, $\mathbf{X} = [X, Y, Z, \phi_x, \phi_y, \phi_z]^T \in \mathbb{SE}(3)$ can be controlled using the humanoid right and left hands. Figure 1 shows the control framework, with its two main modules: the Stack-of-Tasks, a generalized inverse kinematics abstraction layer [7], and an impedance controller. Impedance control is a method for regulating the contact of a robot with its environment [8]. Here, it is applied to track a desired trajectory $(\dot{\mathbf{X}}_d, \ddot{\mathbf{X}}_d)$, given the force and torque measured at the robot wrists.

In [6], only the projection of the table on the ground (X, Y, ϕ_z) was controlled, as for an object moving on a plane. Here, Z is also regulated. Since controlling the 2 remaining DOFs does not fit with the task of keeping the table horizontal, these are left compliant ($\phi_x = \phi_y = 0$).

This work is supported in part by the FP7 IP RoboHow.Cog project (www.robohow.eu). FP7-ICT-2011-7 Contract No 288533.

More details on this work are given in [1], [2].
¹CNRS-UM2 LIRMM, 161 Rue Ada, 34392 Montpellier, France {firstnames.lastname}@lirmm.fr.

²CNRS-AIST, JRL (Joint Robotics Laboratory), AIST Central 2, Umezono 1-1-1, Tsukuba, 305-8568, Japan.

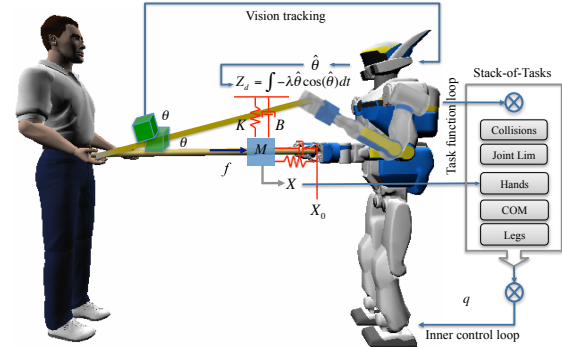


Fig. 1. A simplified block diagram of the control framework

Instead of observing Z directly, we estimate the inclination of the table θ . A visual tracker [9] is used to estimate θ , from the pose of an object resting on the table (e.g., the cube in Fig. 1). The tracker is adapted to handle disturbances (e.g., due to the walking motion). Then, a visual servoing controller that zeroes θ , to keep the table horizontal, is designed. It outputs the desired vertical table velocity \dot{Z}_d , which is integrated and fed to the impedance controller.

Several experiments, integrating vision with the previous works [6], were performed with the robot HRP-2. Some of these are shown in the video at <http://youtu.be/YeHTZjchZSg>. Since the height is observable by both vision and force/torque sensors, these have been compared, showing that vision is more precise for this task. Future work includes posture interpretation, for understanding by the partner motion intention.

REFERENCES

- [1] D. J. Agravante, A. Cherubini, A. Bussy, and A. Kheddar, "Human-humanoid joint haptic table carrying task with height stabilization using vision," in *IROIS, 2013 (to appear)*.
- [2] D. J. Agravante, A. Cherubini, A. Bussy, P. Gergondet, and A. Kheddar, "Carrying a free-moving ball on a table by human-humanoid dyad using vision and haptic sensing," in *Humanoids, 2013 (submitted)*.
- [3] K. Yokoyama, H. Handa, T. Isozumi, Y. Fukase, K. Kaneko, F. Kanehiro, Y. Kawai, F. Tomita, and H. Hirukawa, "Cooperative works by a human and a humanoid robot," in *ICRA, 2003*.
- [4] Y. Maeda, T. Hara, and T. Arai, "Human-robot cooperative manipulation with motion estimation," in *IROIS, 2001*.
- [5] E. Gribovskaya, A. Kheddar, and A. Billard, "Motion learning and adaptive impedance for robot control during physical interaction with humans," in *ICRA, 2011*.
- [6] A. Bussy, A. Kheddar, A. Crosnier, and F. Keith, "Human-humanoid haptic joint object transportation case study," in *IROIS, 2012*.
- [7] N. Mansard, O. Stasse, P. Evrard, and A. Kheddar, "A versatile generalized inverted kinematics implementation for collaborative working humanoid robots: The stack of tasks," in *ICAR, 2009*.
- [8] N. Hogan, "Impedance control - An approach to manipulation," *ASME Transactions Journal of Dynamic Systems and Measurement Control B*, vol. 107, pp. 1-24, Mar. 1985.
- [9] A. I. Comport, E. Marchand, M. Pressigout, and F. Chaumette, "Real-time markerless tracking for augmented reality: the virtual visual servoing framework," *Visualization and Computer Graphics, IEEE Transactions on*, vol. 12, no. 4, pp. 615-628, 2006.